

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION

PRODUCT NAME: SBP-4R6 TYPE




PART NO: SBP-4R6-1595BP24M

Center frequency	1595MHz		
Pole	4		
Bandwidth(BW)	Fo $\pm$ 12 MHz		
Insertion Loss	2.8dB max		
VSWR in BW	1.4max		
Ripple in BW	0.5dB max		
Attenuation	1000 ... 1358MH	at	45dBc min
	1358MHz ... 1582MHz	at	11dBc min
	1582MHz ... 1591MHz	at	3dBc min
	1657MHz ... 1666MHz	at	3dBc min
	1666MHz ... 1890MHz	at	11dBc min
	1890MHz ... 2000MHz	at	45dBc min
In/Out Impedance	50 ohm		

NOTE:

EQUIPMENT used :HP 8753E



DIMENSION:

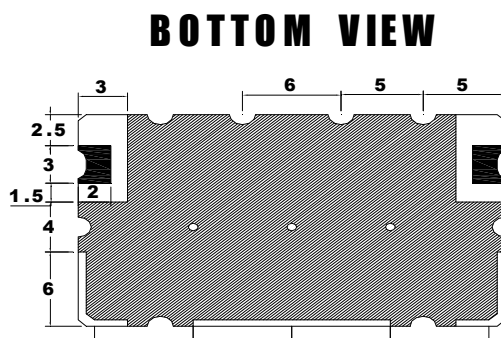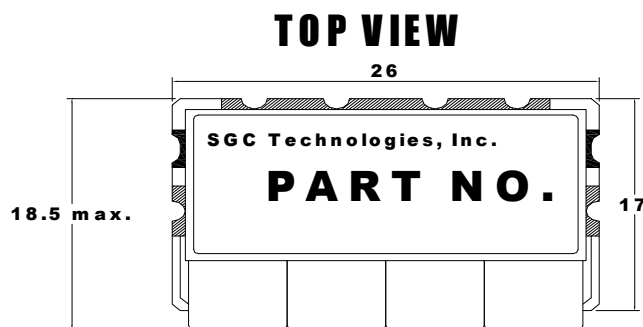

**TOLERANCE UNLESS
OTHERWISE SPECIFIED : $\pm$ 0.3
DIMENSIONS : m m**

 **GROUND**
 **I/O PORT**

SBP-4R6-1595BP24B

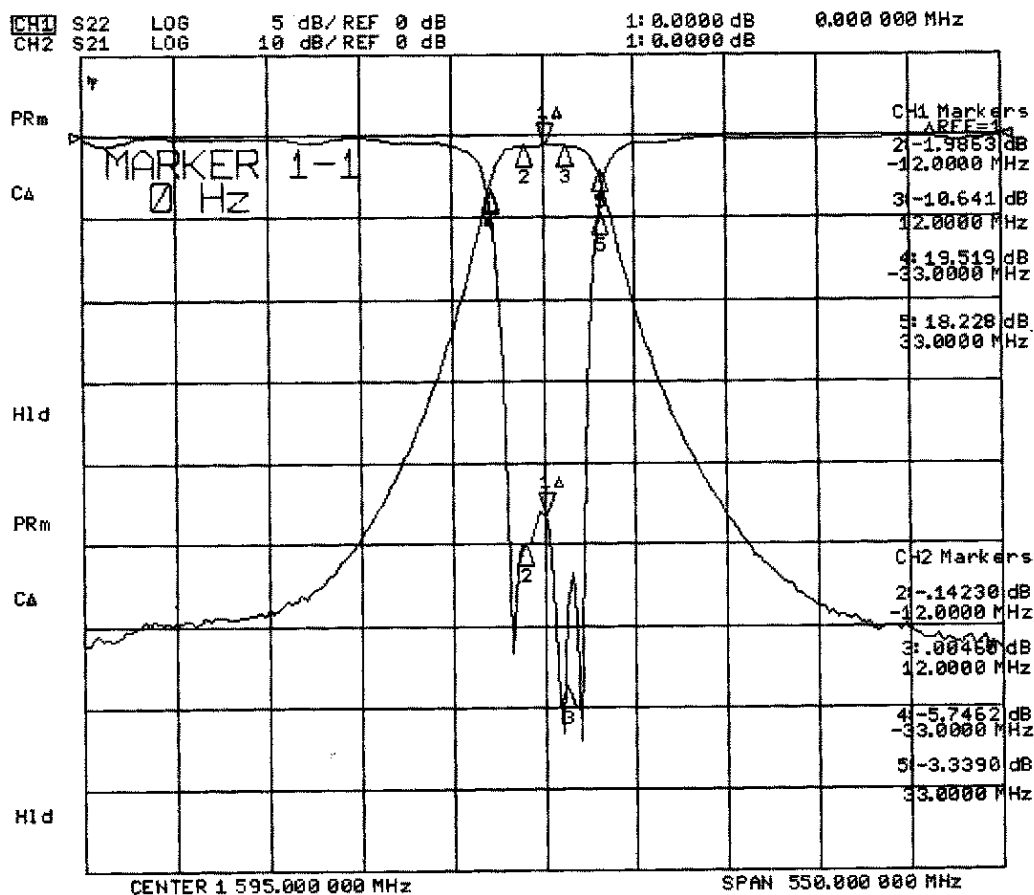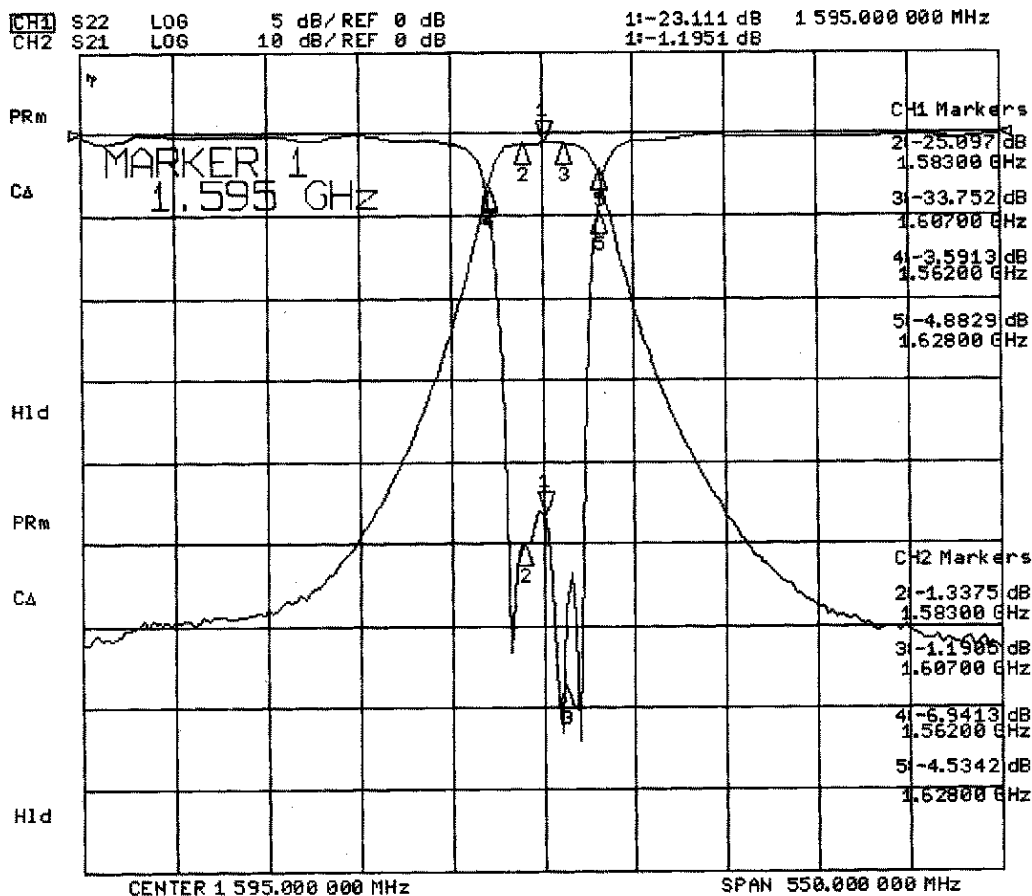

SBP-4R6-1595BP24B

