

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION

PRODUCT NAME: SBP-4R6 TYPE




PART NO: SBP-4R6-1595BP46M

Center frequency	1595MHz		
Pole	4		
Bandwidth(BW)	Fo $\pm$ 23 MHz		
Insertion Loss	1.4dB max		
VSWR in BW	1.5max		
Ripple in BW	0.5dB max		
Attenuation	1000 ... 1343MH	at	45dBc min
	1343MHz ... 1511MHz	at	11dBc min
	1511MHz ... 1552MHz	at	3dBc min
	1638MHz ... 1676MHz	at	3dBc min
	1676MHz ... 1846MHz	at	11dBc min
	1846MHz ... 2000MHz	at	45dBc min
In/Out Impedance	50 ohm		

NOTE:

EQUIPMENT used :HP 8753E



DIMENSION:

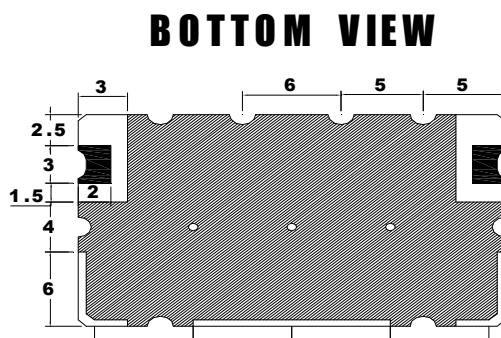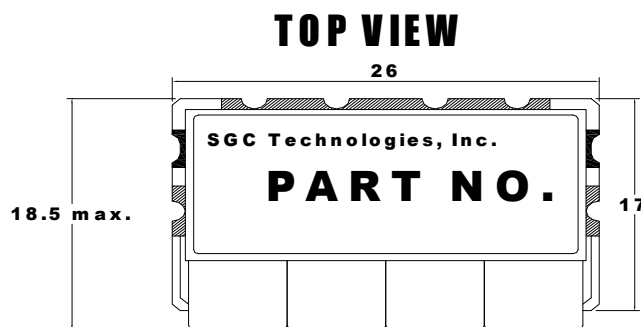

**TOLERANCE UNLESS
OTHERWISE SPECIFIED : $\pm$ 0.3
DIMENSIONS : mm**

 **GROUND**
 **I/O PORT**

SBP-4R6-1595BP46B

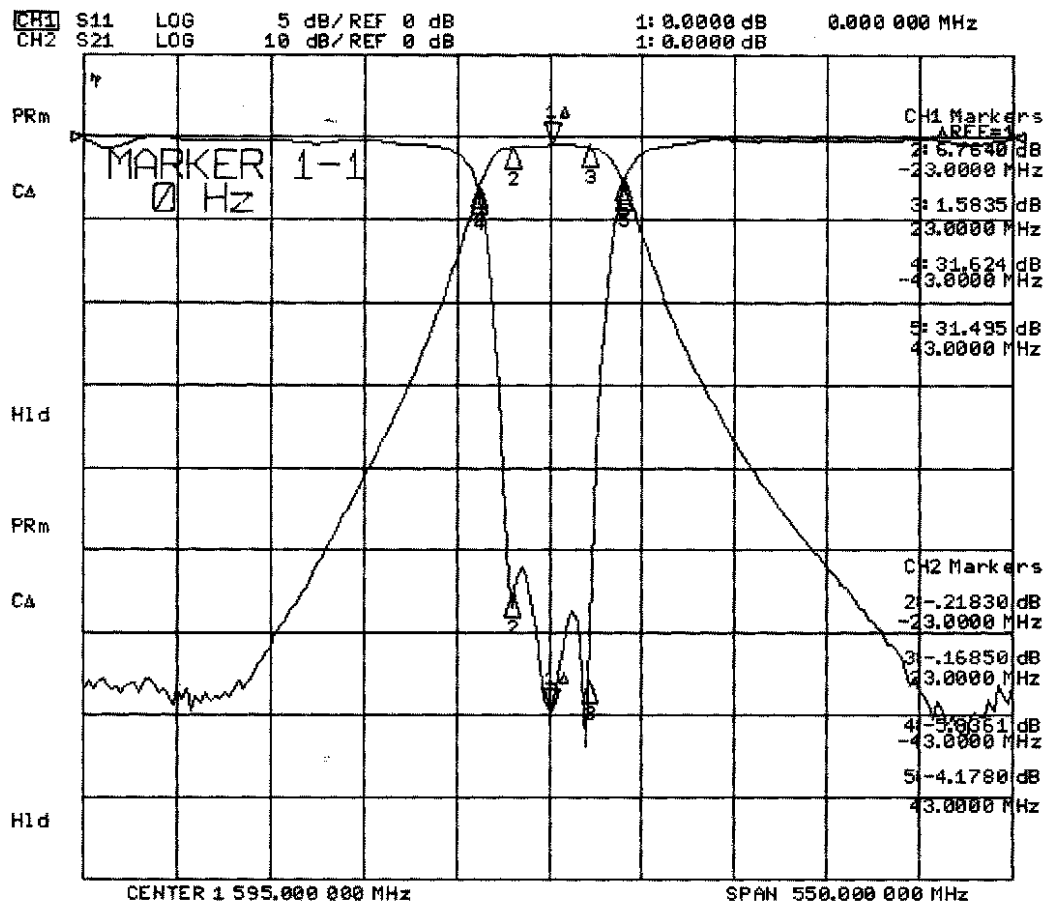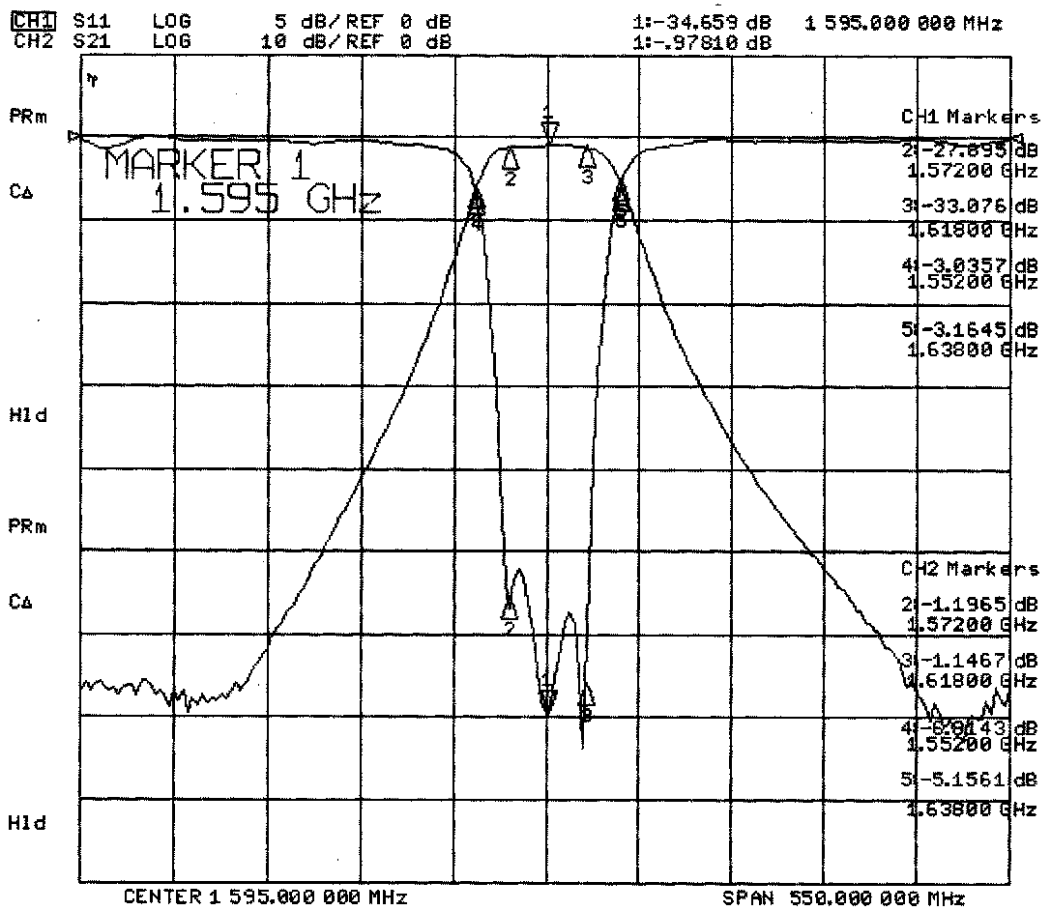

SBP-4R6-1595BP46B

