

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION

PRODUCT NAME: SBP-4R6 TYPE


PART NO: SBP-4R6-2150BP60A

Center frequency	2150MHz
Pole	4
Bandwidth(BW)	Fo $\pm$ 30 MHz
Insertion Loss	2.0 dB max
VSWR in BW	1.5 max
Ripple in BW	0.3 (typ 0.25) dB max
Attenuation	30dB (at 1980MHz)
In/Out Impedance	50 ohm
Operating Temp	-40℃ to +70℃
Relative Humidity	0~95 %
PCB Material & T	FR4 & 0.6 T


NOTE:

EQUIPMENT used :HP 8753E


DIMENSION:

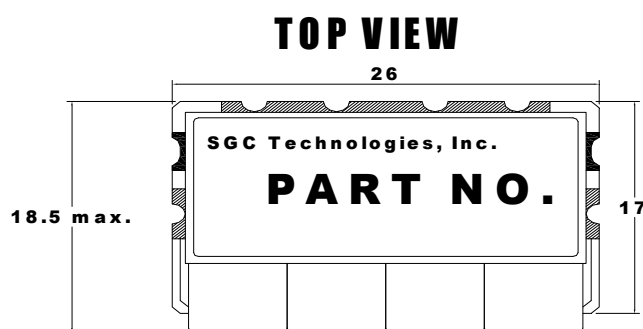

SIDE VIEW



BOTTOM VIEW

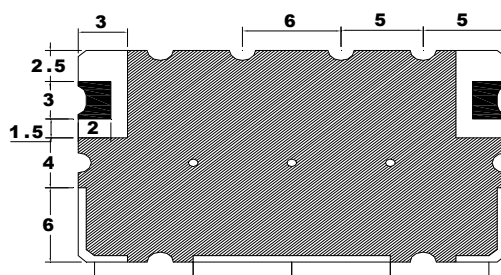

**TOLERANCE UNLESS
OTHERWISE SPECIFIED : $\pm$ 0.3
DIMENSIONS : mm**

 **GROUND**
 **I/O PORT**

Graph

SBP-4R6-2150BP60A

