

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION

PRODUCT NAME: SDPX-6R6-TYPE


PART NO: SDPX-1950-6R6-1480BP20M

Center frequency	1950 MHz	1480 MHz
Pole	6	6
Bandwidth(BW)	Fo $\pm$ 10 MHz	Fo $\pm$ 10 MHz
Insertion Loss	2.0 dB max	2.0 dB max
VSWR in BW	1.5 max	1.5 max
Ripple in BW	0.3 dB max	0.3 dB max
Attenuation	55dB min at 1470MHz-1490 MHz	55dB min at 1940MHz-1960MHz
In/Out Impedance	50 ohm	50 ohm

NOTE:

EQUIPMENT used :HP 8753E

DIMENSION:

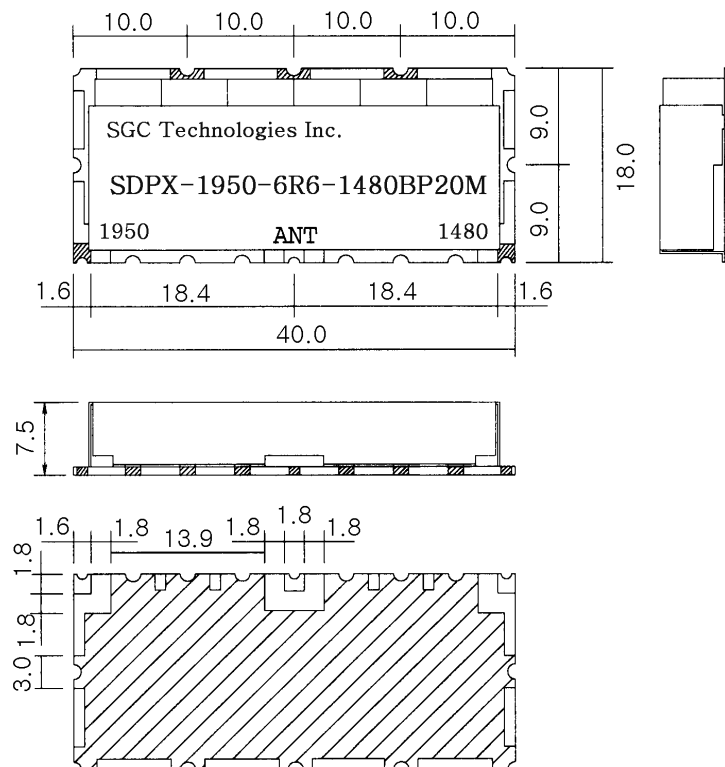

TOLERANCES UNLESS
OTHERWISE SPECIFIED: ± 0.2
UNIT: mm

SDPX-1950-6R6-1480BP20M

