

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION

PRODUCT NAME: SDMP8J TYPE



PART NO: SDMP8J1950A2140BP20B

	Rx	Tx
Center frequency	1950 MHz	2140 MHz
Bandwidth(BW)	20 MHz	20 MHz
Insertion Loss	1 dB max.	2.5 dB max.
Return Loss	15 dB min.	15 dB min.
Ripple in BW	0.5 dB max.	0.7 dB max.
Attenuation	60 dB min. @ 2130 ~ 2150 MHz	60 dB min. @ 1940 ~ 1960 MHz 5 dBC min. @ 2120 MHz 5 dBC min. @ 1940 ~ 1960 MHz 50 dB min. @ 2070 MHz
In/Out Impedance	50 ohm	

NOTE: EQUIPMENT used :HP 8753E

DIMENSION:

#SDMP8J TYPE

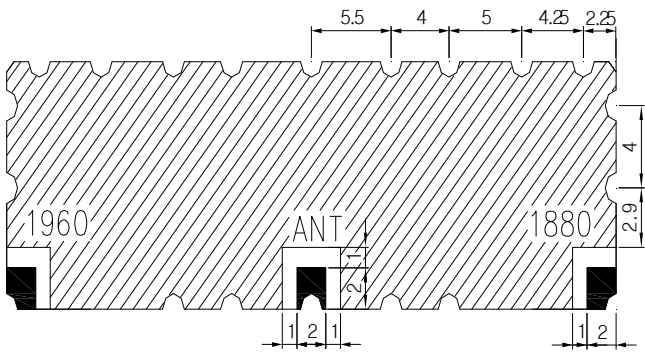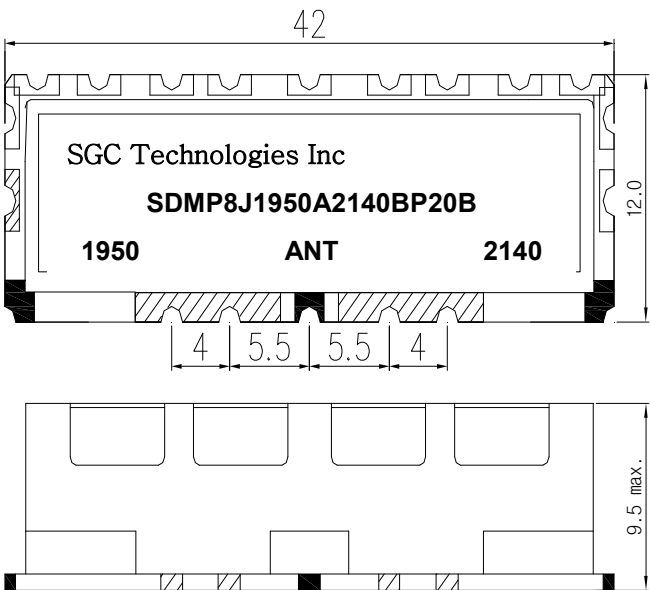

■ : I/O PORT

▨ : GROUND

TOLERANCE UNLESS
OTHERWISE SPECIFIED : ±0.3

UNITS : mm